



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :

H03L 3/00

A2

(11) International Publication Number:

WO 96/37960

(43) International Publication Date: 28 November 1996 (28.11.96)

(21) International Application Number: PCT/US96/07571

(22) International Filing Date: 23 May 1996 (23.05.96)

(30) Priority Data:

08/451,206

26 May 1995 (26.05.95)

US

(71) Applicant: NATIONAL SEMICONDUCTOR CORPORATION [US/US]; 2900 Semiconductor Drive, M/S D3-579, Santa Clara, CA 95051 (US).

(72) Inventor: SHAY, Michael, J.; 2021 Thames Drive, Arlington, TX 76017 (US).

(74) Agent: CONSER, Eugene; National Semiconductor Corporation, 2900 Semiconductor Drive, M/S D3-579, Santa Clara, CA 95051 (US).

(51) Designated States: DE, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: CONFIGURABLE POWER MANAGEMENT SCHEME

## (57) Abstract

A power management system is disclosed. The system includes an oscillator interface for use in a power management system, a power recycle circuit for use in a power management system, a pad clock and self test for use in a power management system, a clock enable circuit for use in a power management system, a power level detect circuit for use in a power management system, an internal source clock generation circuit for use in a power management system, and a power-save mode change detection circuit for use in a power management system. The oscillator interface includes an interface circuit for interfacing with an external oscillator used as a source of oscillations. A clock stabilization filter masks out spurious crystal frequencies in the oscillations during start-up of the power management system following an enabling of a feedback loop. The clock stabilization filter has circuitry which provides that the oscillations will start with a rising transition after filtering. A bypassing circuit enables the clock stabilization filter when the external oscillator is a crystal oscillator and for bypassing the clock stabilization filter when the external oscillator is a can oscillator. A masking circuit masks the oscillations from the rest of the power management system. The masking circuit has circuitry which disables the clock masking after a falling edge of the oscillations and starts back up with a rising transition of the oscillations.

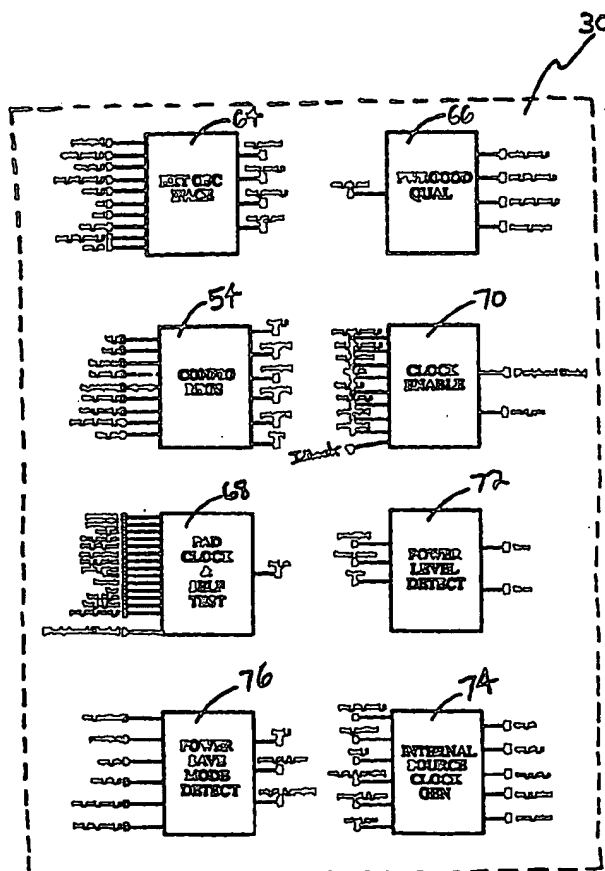

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## CONFIGURABLE POWER MANAGEMENT SCHEME

BACKGROUND OF THE INVENTION1. Field of the Invention

The present invention relates to power management systems, and more particularly, to a configurable power management system.

2. Description of the Related Art

Previous power management systems for use with integrated circuit (IC) chips have been limited in their ability to be configured. Thus, there is a need for a power management system which is configurable.

SUMMARY OF THE INVENTION

The present invention provides an oscillator interface for use in a power management system. An interface circuit interfaces with an external oscillator used as a source of oscillations. A clock stabilization filter masks out spurious crystal frequencies in the oscillations during start-up of the power management system following an enabling of a feedback loop. The clock stabilization filter has circuitry which provides that the oscillations will start with a rising transition after filtering. A bypassing circuit enables the clock stabilization filter when the external oscillator is a crystal oscillator and bypasses the clock stabilization filter when the external oscillator is a can oscillator. A masking circuit masks the oscillations from the rest of the power management system. The masking circuit has circuitry which disables the clock masking after a falling edge of the oscillations and starts back up with a rising transition of the oscillations.

The present invention also provides a power recycle circuit for use in a power management system. An input receives a clock signal. A detection circuit senses a minimum disable pulse when a clock signal is received and when a clock signal is not received. A power recycle circuit generates a power recycle signal in response to the minimum disable pulse. A state machine holds the power recycle signal for at least two clock cycles.

The present invention also provides a pad clock and self test circuit for use in a power management system. An input receives an oscillator clock. A clock generation circuit generates at a clock output a first pad clock having a frequency approximately equal to one-half a frequency of the oscillator clock, a second pad clock having a frequency that is forced equal to a programmable fraction of the frequency of the oscillator clock, and a low signal. The clock generation circuit has a first operating mode in which the second pad clock is generated and a second mode in which internal signals of the power management system can be observed and the clock output is forced to a known level.

The present invention also provides a clock enable circuit for use in a power management system. A clock branch generator generates a first clock signal to drive a sequential device which is internal to the power management system. A clock enabling/disabling circuit disables the first clock after a falling edge on an internal source clock, holds the first clock low during disabling, re-enables the first clock after a falling edge of the internal source clock, and subsequently begins a first rise of the first clock with a next rising transition of the internal source clock. The clock enabling/disabling circuitry does not stop an external CPU core clock when the external CPU is actively performing a bus cycle.

The present invention also provides a power level detect circuit for use in a power management system. An analog voltage-level detector interface has a programmable override function for providing a digitally encoded voltage level as an output which is used for global configuration. An input receives an analog enable signal to turn on a DC-current source of an external voltage-level detector and a read strobe. A voltage-level detector input is sampled.

The present invention also provides an internal source clock generation circuit for use in a power management system. A synchronous counter with a synchronous load to a count of one and an asynchronous clear has a plurality of count output signals. A first multiplexer having two outputs is coupled to the synchronous counter and receives the plurality of count output signals. A second multiplexer having one output is coupled to the first multiplexer. A flip-flop is coupled to the output of the second multiplexer, and a clock referenced to an external oscillator clock samples an output of the flip-flop.

The present invention also provides a power-save mode change detection circuit for use in a power management system including an internal source clock, a first bank of flip-flops coupled to the internal source clock, and a second bank of flip-flops coupled to the internal source clock. A comparator compares the first and second banks of flip-flops and generates an equality signal when there is a difference between storage values of the first and second banks of flip-flops. A change indicator is asserted when a power-save mode is asserted in one of the first and second banks of flip-flops. The change indicator is sampled with a clock which is referenced to a falling edge of a system clock, and a synchronous load 1 pulse is generated until a next rising edge of an internally qualified reference an external oscillator clock.

A better understanding of the features and advantages of the present invention will be obtained by reference to the following detailed description of the invention and accompanying drawings which set forth an illustrative embodiment in which the principles of the invention are utilized.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram illustrating a power management system in accordance with the present invention.

Figure 2 is a block diagram illustrating a system which incorporates the power management system shown in Figure 1.

Figure 3 is a schematic diagram illustrating the configuration unit shown in Figure 1.

Figure 4 is a schematic diagram illustrating the external oscillator interface shown in Figure 1.

Figure 5A is a schematic diagram illustrating the powergood qualification block shown in Figure 1.

Figure 5B is a state diagram illustrating the operation of the powergood qualification schematic shown in Figure 5A.

Figure 6 is a schematic diagram illustrating the pad clock and self test block shown in Figure 1.

Figures 7A and 7B are schematic diagrams illustrating the clock enable block shown in Figure 1.

Figures 8 and 9 are schematic diagrams illustrating the power level detect block shown in Figure 1.

Figure 10 is a schematic diagram illustrating the internal source clock generation block shown in Figure 1.

Figure 11 is a schematic diagram illustrating the power-save mode change detection block shown in Figure 1.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 1, there is illustrated a power management system 30 in accordance with the present invention. Referring to Figure 2, the power management system 30 is ideal for being implemented in the system 32. The system 32 is described in the data sheet entitled "Elentari Optimized 32-bit 486-class Controller With On-chip Peripherals for Embedded Systems", authored by National Semiconductor Corporation of Santa Clara, California, a copy of which is attached hereto as Appendix A and is incorporated herein by reference. The system 32 includes a CPU 34, a DMA controller 36, a DRAM memory controller 38, a PCMCIA controller 40, a bus interface unit (BIU) 42, an ECP parallel port 44, an LCD controller 46, as well as other components. Although the power management system 30 is ideal for incorporation into the system 32, it should be well understood that such incorporation is not a

requirement of the present invention and that the teachings of the present invention may be applied to smaller (or larger) stand-alone applications. Also attached hereto as Appendix B is a copy of a document entitled "Elentari Core Internal Bus Spec" which is also incorporated herein by reference. Finally, attached hereto as Appendix C is a copy of a document entitled "Internal Peripheral Bus Signals" which is also incorporated herein by reference.

The power management system 30 includes a number of power saving mechanisms that can be combined to achieve comprehensive power savings under a variety of system conditions. First of all, the core processor 34 power consumption can be controlled by varying the processor/system clock frequency. The internal CPU clock can be divided by 4, 8, 16, 32 or 64. In addition, in idle mode, the internal processor clock will be disabled. Finally, if an crystal oscillator circuit or external oscillator is being used, it can be disabled. For maximum power savings, all internal clocks can be disabled (even the real-time clock oscillator).

Some peripherals, notably the timer 48 and the PCMCIA interface 40 can be switched between a fixed frequency (external oscillator/2) and the CPU clock. When the CPU clock is being divided, this can reduce their power consumption. Note that the clocks for other on-board peripherals can be individually or globally controlled. By setting bits in the power management control registers (discussed below), the internal clocks to the DMA controller 36, the ECP port 44, the three-wire interface 50, the timer 48, the LCD controller 46, the DRAM controller 38, the PCMCIA controller 40 and the UART 52 can be disabled. In addition, the power management system 30 can programmed the of use CMOS level I/Os or TTL level I/O settings in the system 32. Finally, the external SYSCLK can be disabled via a bit in the Power Management Control Register.

The power management system 30 includes several modes of operation which are listed here in decreasing power consumption order (i.e., full power to least power). In the Normal Mode all clocks are at full speed, with the Timer, PCMCIA, SYSCLK connected to `cpu_dock` or external `OSC/2`, and the UART, DRAM refresh logic, and LCD Controller connected to `OSC dock`, and the RTC connected to `RTC_osc`. In the Power Save Mode, first, the CPU clock is divided by 4, 8, 16, 32 or 64, with the Timer, PCMCIA, SYSCLK connected to external `OSC/2`, the UART, DRAM logic, and LCD Controller connected to `OSC`, and the RTC connected to `RTC_osc`. Second, the CPU clock is divided by 4, 8, 16, 32 or 64 with the Timer, PCMCIA, SYSCLK connected to `cpu_clk`, UART, DRAM logic, LCD Controller connected to `OSC`, and RTC connected to `RTC_osc`. In the Peripheral Power Down Mode the individual Peripherals can be disabled. In the Idle Mode the CPU clock is disabled with all peripherals unaffected, and RTC connected to `RTC_osc`. In the Crystal Oscillator Circuit Disable/Power Down Mode, first, if a crystal oscillator circuit is being used to drive the system 32, this mode will disable the oscillator circuit (NOTE: after being turned back on, it will take approximately 1 msec for the external crystal to stabilize). Second, if an external oscillator is being used, Power Down mode will disable all the system 32 clocks except for the `RTC_osc`. (NOTE: This is much faster upon recovery, as there is no stabilization delay). It should be noted that the RTC oscillator is always enabled even during power down mode; it can be disabled if desired.

The following indicates what peripherals are connected to which clocks and how those clock can be disabled/enabled. The CPU 34: 1) Uses `cpu_clk` (Full speed clock = `OSC_CLK/2`); 2) `cpu_clk` can be divided by 4, 8, 16, 32 or 64; 3) In Idle mode, the clock is disabled. The Timer 48, PCMCIA 40, SYSCLK: 1) uses `cpu_clk` (full speed or divided by 4, 8, 16, 32 or 64); 2) or can use external `OSC_CLK/2` (when `cpu_clk` is divided); 3) can be individually disabled. The UART 52, DRAM refresh logic, LCD Controller 46: 1) Connected to `OSC`; 2) can be individually disabled. The ECP 44 and the Three-wire Serial Interface 50: 1) Connected to `OSC_CLK/2`; 2) can be individually disabled. The DMA Controller 36 and Bus Interface Unit 42: 1) Uses `cpu_clk` (full speed or divided). The DRAM Controller 38: 1) Must use `OSC_CLK` for DRAM refresh cycles; 2) Sequencer can selectably use `cpu_clk` or  $2 \times \text{cpu\_clk}$ ; 3) For state machine logic, must use `cpu_clk`. The Real-Time

Clock: 1) Uses RTC\_osc - typically always enabled, but it can be disabled through the RTC interface. The Global Peripheral Clock Disable/Enable: 1) Controls DMA Controller, ECP, Three-wire Interface, and UART.

The power management system 30 includes several power management modes. Power saving features include the following. In Idle Mode the internal clock to the CPU 34 will be disabled. All enabled peripheral blocks will continue to operate. Any interrupt or reset will re-enable the internal clock to the CPU 34. It should be noted that when the CPU 34 is in Idle Mode, the instruction cache cannot snoop. Normally, the cache will snoop the addresses to see if a cache address is being updated. If so, it flushes the cache. Therefore, the user's can take the appropriate action when the CPU 34 is idled. Also, when the CPU 34 is in Idle Mode, the BIU 42 is designed to mimic the CPU 34 during DMA interchanges between memory and peripherals. By responding to DRQs and generating DACKs, HOLDs and HOLDAs signals as required, the BIU 42 eliminates the need to reactivate the CPU 34 during such transfers as screen updates from memory to the LCD controller 46. This gives the designer added flexibility in conserving power while maintaining basic system functions.

A Power-save Mode reduces the internal CPU 34/system clock's frequency by dividing the internal CPU clock by 4, 8, 16, 32 or 64 (Refer to Power Management Register 1 for more information) The internal clocks for the UART 52, DRAM refresh logic, LCD Controller 46 and RTC will be unaffected in this mode. The Timer, PCMCIA and SYSCLK all have selectable clock sources between a fixed frequency, which is the external oscillator/2 and cpu\_clk. Only when a cpu\_clk source is selected will these clocks be affected by Power-save mode.

The Crystal Oscillator Circuit Disable function disables the feedback output of the crystal oscillator circuit (i.e. forces OSCX2 low). Normally, the feedback output is used to provide a high-gain feedback to an external crystal to start, stabilize, and maintain a reference oscillation from the crystal. If the feedback is disabled the oscillation will stop. After the feedback output is re-enabled, it takes approximately 1 msec for the external crystal to start and stabilize. On-chip, there is a lowpass filter and counter to insure that none of the start-up and stabilize oscillations are allowed to pass into the rest of the chip. If an external TTL or CMOS oscillator is used then the feedback output can be disabled to save power. Also, the low-pass filter and counter can be bypassed by setting bit 7 of Power Management Configuration Register 4. This latter action may be useful when an external TTL or CMOS oscillator is used.

In the Power Down Mode all of the internal system 32 clocks except the RTC oscillator will be disabled. If a crystal is used to generate the CPU clock, the CPU Oscillator Circuit Disable feature may be used to turn off the clock instead of this mode. If an external oscillator drives CPUX1, then this mode should be used to turn off the system 32 internal clocks. It is important that power be applied to and removed from the LCD display in proper sequence, otherwise damage can result. To prevent damage to the LCD panels, the external DC power supplied to the LCD Display ( $V_{EE}$ ) should be disabled before the LCD Controller's clock is disabled.

The power-up sequence is as follows: 1) Configure the LCD control registers; 2) Apply  $V_{DD}$  (5V or 3V) to the display; 3) Enable the LCD clock from the power management registers - this must be done within 20 msec of applying  $V_{DD}$ ; 4) Enable the LCD controller. 5) Within 20 msec. max after applying the LCD clock, apply  $V_{EE}$  (22V/-26V) to the display. The power-down sequence is as follows: 1) Remove  $V_{EE}$  from the display; 2) Disable the LCD controller; 3) Within 20 msec. of removing  $V_{EE}$ , disable the LCD clock; 4) Within 20 msec. of removing the LCD clock, remove  $V_{DD}$  from the display. The LCD clock should never be disabled when the LCD is enabled.

The internal clocks for various internal peripherals may be individually enabled/disabled via bits of Power Management Registers 2 and 3 (discussed below). A peripheral's internal clock should only be disabled if that internal peripheral is not to be used.

With respect to global enable/disable of peripheral clocks, when bit 7 of Power Management Register 2 is set to a one, the internal clocks to the DMA Controller 36, ECP 44, Three-Wire Interface 50, and UART logic 52 will all be disabled. When that bit is a zero, the individual peripheral clock enable/disable bits will determine if the individual peripheral clocks are enabled or not. The DRAM 38 and LCD Controllers 46, PCMCIA 40, BIU 42 and Timer 48 are not affected by global clock enabling/disabling.

The system 32 I/Os are power supply-level configurable. The power management system 30 controls voltage sensing and setting for I/O supply-level configuration. The power management system 30 has the capability to set the operating voltage through firmware (Bit 5 of Power Management Register 4).

As mentioned above, the power management system 30 includes several Power Management Configuration Registers. The Configuration Register Unit (CRU) 54 contains the configuration registers for controlling the operation of the power management system 30. The CRU 54 also contains a peripheral bus interface for reading and writing of the configuration registers.

Referring to Figure 3, Power Management Register One 56 is a read/write register and has an I/O map address of EF90h. The bit assignments are as follows. Bit 7 is reserved. Bit 6 is the Idle Mode selection bit IDLE. A "1" sets the chip in Idle Mode (cpu\_clk disabled). All resets and interrupts force this bit to a "0". Bit 6 is the oscillator disable bit COSCD—CPU (used with crystal oscillator). A "1" disables the CPU oscillator. All resets and interrupts force this bit to a "0". Bit 4 is a Power-down Mode selection bit PDM (used with external OSC). A "1" sets the chip to Power-down Mode. All resets and interrupts force this bit to a "0". Bit 3 is Power-save Mode selection bit PSVM (divides cpu\_clk). A "1" sets the chip to the Power-save Mode. All resets force this bit to a "0". Bits 2-0 are Power-save Mode clock division bits SVB[2:0]. All resets force these bits to a "0". Table A illustrates the operation of these bits.

SVB[2]	SVB[1]	SVB[0]	Divide By
0	0	0	1
0	0	1	4
0	1	0	8
0	1	1	16
1	0	0	32
1	0	1	64
1	1	X	reserved

TABLE A

Power Management Register Two 58 is a read/write register and has an I/O map address of EF91h. The bit assignments are as follows. Bit 7 is a Global peripheral clock disabling selection bit GDIS. A "1" causes global peripheral clock disabling. All resets force this bit to a "0". Bit 6 is ECP clock disable selection bit ECP. A "1" disables the ECP clock. All resets force this bit to a "0". Bit 5 is an LCD clock disable selection bit LCD. A "1" disables the LCD clock. All resets force this bit to a "0". The LCD Controller 46 is not affected by global clock enabling/disabling (GDIS, bit 7). Bit 4 is a DMA clock disabling selection bit DMA. A "1" disables the DMA clock. All resets force this bit to a "0". Bit 3 is a timer block clock disabling selection bit TMR. A "1" disables the Timer Clock. All resets force this bit to a "0". The timer is not affected by global clock enabling/disabling (GDIS, bit 7). Bit 2 is a three-wire block clock disabling selection bit TWIR. A "1" disables the Three-wire Clock. All resets force this bit to a "0". Bit 1 is a DRAM block clock disabling selection bit DRAM. A "1" disables the DRAM Clock. All resets force this bit to a "0". The DRAM controller 38 is not affected by global clock enabling/disabling (GDIS, bit 7). Bit 0 is a UART block clock disabling bit UART. A "1" disables the UART Clock. All resets force this bit to a "0".

Power Management Register Three 60 is a read/write register and has an I/O map address of EF92h. The bit assignments are as follows. Bit 7 is reserved. Bit 6 is an External Driver Configuration bit DRVCON for system bus and DRAM interface I/Os. This bit only has an affect when the interface SETV bit is set to a "1". A "1" guarantees CMOS level output voltages/drive. A "0" guarantees TTL level output voltage/drive (low noise I/O configuration). Bit 5 is a PCMCIA Clock reference Selection bit PCS. A "1" corresponds to Cpu\_clk clock reference (affected by Power Save Mode), and a "0" corresponds to standard clock reference (not affected by Power Save Mode). All resets force this bit to a "0". Bit 4 is a PCMCIA block clock disabling selection bit PCMCIA. A "1" disables the PCMCIA clock. All resets force this bit to a "0". Bit 3 is a Timer Clock reference Selection bit TCS. A "1" corresponds to Cpu\_clk clock reference (affected by Power Save Mode), and a "0" corresponds to standard clock reference (not affected by Power Save Mode). All resets force this bit to a "0". Bit 2 is a SYSCLK clock disabling selection bit SYSCLK. A "1" disables the SYSCLK. Only PWRGOOD reset forces this bit to a "0". Bit 1 is a SYSCLK reference Selection bit SCS. A "1" corresponds to Cpu\_clk clock reference (affected by Power Save Mode), and a "0" corresponds to standard clock reference (not affected by Power Save Mode). Only PWRGOOD reset forces this bit to a "0". Bit 0 is a DRAM sequencer clock frequency mode bit SEQU. A "1" sets the same frequency as the Cpu\_clk clock reference, and a "0" doubles the frequency of the Cpu\_clk clock reference. Only PWRGOOD reset forces this bit to a "0".

Power Management Register Four 62 is a read/write register and has an I/O map address of EF93h. The bit assignments are as follows. Bit 7 is an external clock source description bit CAN\_OSC. A "1" corresponds to a CMOS or TTL oscillator, and a "0" corresponds to a crystal oscillator. Only



PWRGOOD reset forces this bit to a "0". Bit 6 is reserved. Bit 5 is a software setting of Operating Voltage bit SETV. A "1" sets 5V operating voltage, and a "0" sets 3.3V operating voltage (default). Only PWRGOOD reset forces this bit to a "0". Bits 4-0 are reserved.

The power management system 30 includes seven other major partitions. Referring to Figure 4, the External Oscillator Interface (EOI) 64 contains the circuitry that interfaces with an external oscillator. The external oscillator may be a crystal or a can. The circuitry is responsible for controlling the feedback loop of the analog interface to the external crystal. When the feedback loop is enabled, the external crystal is forced to oscillate, when disabled the external crystal can not oscillate. If a can oscillator is used the feedback control does not affect the operation of the external oscillator, and thus an oscillation will pass into the external interface circuitry whether or not the feedback loop is enabled. Feedback disabling may be reset to an enabled state by any one of the following ways: powering-down and back-up, sending out a watchdog reset (the watchdog timer is driven by a separate clock coming from the real-time clock), and a maskable or non-maskable interrupt. The feedback loop is enabled by programming a one in the COSCD bit in configuration register one 56 to a "1". Circuitry is used to guarantee that the clock is disabled after a falling edge (Oscillator Disable Mode).

The EOI 64 also contains a clock stabilization filter for masking out spurious crystal frequencies during its start-up following the enabling of the feedback loop. The filter is used when crystals are the source of oscillations; otherwise, when an external can oscillator is used (programmed as the clock source), the filter is bypassed. The bypassing is controlled by programming the CAN\_OSC bit in configuration register four 62 to a "1". Circuitry is used to guarantee that clock will come up after filtering, starting with a rising transition, without any logic-generated spurious glitches.

The EOI 64 contains a circuit that masks the incoming clock from the rest of the power management block as well as the rest of the chip (independent of the previously described functionality). The circuit allows an external frequency to come into the part but stay isolated within the EOI 54. The clock masking is enabled by programming a one in the PDM bit in configuration register one 56 to a "1". General clock masking may be reset to an enabled state by any one of the following ways: powering-down and back-up, sending out a watchdog reset (the watchdog timer is driven by a separate clock coming from the real-time clock), and a maskable or non-maskable interrupt. Circuitry is used to guarantee that the clock masking is disabled after a falling edge and starts back up with a rising transition, without any logic-generated spurious glitches (Power Down Mode).

Referring to Figures 5A and 5B, the Powergood Qualification (PQ) block 66 contains a detection mechanism for sensing a minimum PWRGOOD disable pulse. The detector will detect a PWRGOOD disable pulse independent of whether or not a clock is present. When a PWRGOOD disable occurs, a power recycle signal is immediately generated and held. The PQ block contains a state machine that guarantees that a power recycle indication is held for at least 2 clock cycles. This minimum duration of time is adequate to insure that the power recycle can be processed in other design blocks, such as for example, in asserting a power-up reset. The signal powergood\_int is an asynchronous reset that forces the state machine back to state 00 when asserted.

Referring to Figure 6, the Pad Clock and Self Test (PCST) block 68 provides control of the Pad\_clk which is an output buffer to the external world. In standard operation the PCST block will provide one of the following three configurable conditions. Type 1) a clock whose frequency is constantly one-half that of the external oscillator; Type 2) a clock whose frequency is "generally" one-half that of the external oscillator but is forced equal to a programmable fraction of this frequency when in power-save mode; or, Type 3) disabled low. The Pad\_clk may be brought in and out of disabling into the previous modes without glitching similar to methods used in the CEB. The PCST has two non-standard operating modes which are the In-circuit emulator mode and the test mode. During In-circuit emulator mode operation as determined by the Icemode signal being active, the Pad\_clk's output is designed to be closely in-phase with the clock generated for the embedded CPU. In test mode as

determined by the Test signal being active the PCST is configured to allow observability of internal states of the power management block and force known logic levels on the Pad\_clk port. When in test mode and the Test\_lvl\_en signal deasserted, the clock branches and internal source clocks are selectably muxed out to Pad\_clk. The selection of which clock is driven out is controlled by programming of the lower nibble of configuration register four 62. When the Test\_lvl\_en signal is active logic level of Pad\_clk is equal to the logic level of Test\_hi\_lowz.

Referring to Figures 7A and 7B, the Clock Enable Block (CEB) 70 block contains the clock branch generators for each of the clocks coming out of the power management block driving internal sequential devices. The clock enabling/disabling circuitry is guaranteed to be glitch-free. That is, clocks are disabled after a falling edge on the internal source clocks, are held low during disabling, and are re-enabled after falling edge of the source clock (enabling during the low part of the source clock), and will subsequently begin the first rise with the next rising transition of the internal source clock, without any logic-generated spurious glitches. Special system-level considerations are taken into account for Idle mode assertion. Idle is configurable stoppage of the Clock going to the embedded CPU 34. The main consideration is to not stop the Cpu\_core\_clk when the embedded CPU 34 is actively performing a bus cycle. The process involved in stopping the embedded CPU 34 is to provide an Idlreq to system control logic and for the system control logic to send back an Idlack which is sampled by the CEB 70 to generate a glitch-free disable. In a similar fashion Idle is disabled by deasserting Idfreq and receiving back a deasserted Idlack by the system control logic. The clock will be restarted glitch-free. (IDLE Mode) The source clocks for the CEB 70 are of type 1, type 2, and a 2x frequency version of type 2. Most of the clocks are generated from one or the other of these source clocks, however, the Timer\_clk and Pcmcia\_clk may be configured to have either Type 1 or Type 2 clocks. (Global and Individual Peripheral Disable Mode).

Referring to Figure 8, the Power-Level Detect (PLD) 72 acts as an analog voltage-level detector interface with programmable override. It provides the digitally encoded voltage level as an output which is used for global configuration. An analog enable, D3VEN from configuration register three 60, is available to turn on the DC-current sources of an external voltage-level detector and a read strobe. CHK3V from configuration register three 60, is also available to sample the voltage-level detector input, Pup3V. After the detector input has been sampled, both the CHK3V and D3VEN can be deasserted. It is important to assert D3VEN before CHK3V and deassert in the reverse order so that a correct operational state of Pup3v is captured. The default output of the PLD 72 after a hard reset is one, on port Three. The analog interface functions may be bypassed, and thus, the output signal THREE may be driven under configuration control by the SETV input directly from configuration register three 60.

Referring to Figure 9, many of the system 32 I/Os are power supply-level configurable. As discussed above, the power management system 30 controls the voltage sensing and setting for the I/Os. The power management system 30 described has the capability to set the operating voltage configuration level through firmware and through voltage-level sensing. The interface to an analog voltage sensing circuit is included in the power management block and is controlled by bits 4 and 6 of configuration register four 62. Bit 4 enables the voltage detector. Since analog circuitry generally consumes DC current when active, the enable switch is used to switch the current on or off. The circuit is, therefore, only enabled when voltage detection is needed to reduce power consumption. Bit 6 is used to latch and hold the level of the voltage detector. In this embodiment, the voltage detector needs to detect either a 3.3V or 5V supply level. Thus a 1-bit A/D is used and the output configuration level latched is either a Logic 1 or 0. However, higher order A/Ds may be used if finer levels of voltage-level detection are needed. The power configuration level is stored in configuration register four 62 bit 5. The level may be overridden by firmware. This interface voltage detection scheme has been defined to discern voltages above and below a target detection trip point of for example, 4.0V. Thus, this particular application will have a different configuration level at 5.0V(+/-10%) then at 3.3(+/-10%).

Referring to Figure 10, the Internal Source Clock Generation (ISCG) block 74 generates the internal source clocks. It contains a 7-bit synchronous counter with a synchronous load to a count of one and an asynchronous clear. The block generates the type 2 and 2x frequency version of the type 2 internal source clocks. In standard operation (i.e., NOT power-save mode), the type 2 clock is generated by a feedback of the `cpu_clk_z` source clock output through a two-input mux driving (`pre_cpu_clk`) back into the D-input of the `cpu_clk_z`-generating flip flop which is sampled by a clock referenced to the external oscillator clock called `osc_qualified` (i.e., this is a divide-by-2 function); and in standard mode the 2x type 2 clock is essentially a buffered-and-muxed version of `osc_qualified`. When in power-save mode both the 1x and 2x Type 2 clocks are created starting through the Synchronous counter to two separate divide-by-2 final clock generators. For example, in divide-by-4 clock division the 2x clock will originate from Y0 of the counter (i.e., a  $1/2$  of `osc_qualified`) through the final divide-by-2 clock generator resulting in a divided-by-4 2x clock. Similarly, the 1x clock will originate from Y1 of the counter. Y1 of the counter is a divide-by-4 of `osc_qualified`, which is equal to a divide-by-2 of the "standard" `cpu_clk`. The standard `cpu_clk` is the 1x clock reference frequency. In other words, Y1 of the counter goes through the final divide-by-2 clock generator resulting in a divided-by-4 1x clock. In divide-by-8 mode, counter ports Y1 and Y2 are used respectively, and so on up to divide-by-64. When transitioning to, from, or within the power-save modes the transitions are designed to be glitch free. All changes in frequency are made after the first `osc_qualified` rising edge sample of an active `load_1` input pulse which is generated by the PSVMCD immediately after a falling edge on `cpu_clk`. The new values of the `svb_d1_5_sync` and `psvm_d1_5_sync` inputs on the same rising edge of `osc_qualified`. This process is done so that the total number of periods of the 2x clock is always double the 1x clock over any amount of changes in clock division. This is a critical feature necessary for correct operation of the system. Note that the changes in clock division occur when both the 1x and 2x type 2 clocks are low. Also, note that a 1 is synchronously loaded in the Synchronous counter during a change in frequency. This keeps the 1x and 2x type clocks phase relationship the same through changes in clock division which is also critical to correct system operation. (Power Save Mode).

Referring to Figure 11, the Power-Save Mode Change Detection (PSVMCD) block 76 is used to sample changes in the Power Save Mode control configuration registers, `SVB[2:0]` and `PSVM`. Two banks of flip-flops sampled off of opposite edges of an internal source clock of type 2 are compared (i.e. clocks `cpu_clk` and `cpu_clk_z`). When there is a difference between the two, an intermediate indicator is asserted called `equality_z`. If power-save mode is asserted in either or both of the sampling banks, i.e. `psvm_d1_5` or `psvm_d1`, then a `psvm_change` indicator is asserted. This indication is then sampled by `cpu_clk_z` which is referenced to the falling edge of the system clock and generates a synchronous pulse, referred to as `load_1`, until the next rising edge of an internally qualified reference to the external oscillator clock, i.e. `osc_qualified`, which is at least 2x the frequency of the system clock. So in summary, the `load_1` pulse is generated by the PSVMCD 76 after the falling edge of the system clock and the `load_1` pulse is again deasserted prior to the rising edge of the next system clock. The PSVMCD 76 is used to create and drive the `load_1` pulse into the ISCG at a specific time point in the period of the current system clock and provide synchronized power save mode control signals, i.e. `svb_d1_5_sync` and `psvm_d1_5_sync` that change and become valid with the falling edge (deassertion edge) of the `load_1` pulse which as described in the ISCG is after the first rising edge of `osc_qualified` immediately after a falling edge on `cpu_clk`. (The one exception to this is where the `SVB[2:0]` bus is changing and the `PSVM` is deasserted. In this case a `load_1` pulse will not be created.) This process guarantees that there will be no clock glitches generated in the ISCG when changing the level of clock division.

The invention embodiments described herein have been implemented in an integrated circuit which includes a number of additional functions and features which are described in the following co-pending, commonly assigned patent applications, the disclosure of each of which is incorporated herein by reference: U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "DISPLAY CONTROLLER

CAPABLE OF ACCESSING AN EXTERNAL MEMORY FOR GRAY SCALE MODULATION DATA" (atty. docket no. NSC1-62700); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "SERIAL INTERFACE CAPABLE OF OPERATING IN TWO DIFFERENT SERIAL DATA TRANSFER MODES" (atty. docket no. NSC1-62800); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "HIGH PERFORMANCE MULTIFUNCTION DIRECT MEMORY ACCESS (DMA) CONTROLLER" (atty. docket no. NSC1-62900); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "OPEN DRAIN MULTI-SOURCE CLOCK GENERATOR HAVING MINIMUM PULSE WIDTH" (atty. docket no. NSC1-63000); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "INTEGRATED CIRCUIT WITH MULTIPLE FUNCTIONS SHARING MULTIPLE INTERNAL SIGNAL BUSES ACCORDING TO DISTRIBUTED BUS ACCESS AND CONTROL ARBITRATION" (atty. docket no. NSC1-63100); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "EXECUTION UNIT ARCHITECTURE TO SUPPORT x86 INSTRUCTION SET AND x86 SEGMENTED ADDRESSING" (atty. docket no. NSC1-63300); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "BARREL SHIFTER" (atty. docket no. NSC1-63400); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "BIT SEARCHING THROUGH 8, 16, OR 32-BIT OPERANDS USING A 32-BIT DATA PATH" (atty. docket no. NSC1-63500); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "DOUBLE PRECISION (64-BIT) SHIFT OPERATIONS USING A 32-BIT DATA PATH" (atty. docket no. NSC1-63600); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "METHOD FOR PERFORMING SIGNED DIVISION" (atty. docket no. NSC1-63700); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "METHOD FOR PERFORMING ROTATE THROUGH CARRY USING A 32-BIT BARREL SHIFTER AND COUNTER" (atty. docket no. NSC1-63800); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "AREA AND TIME EFFICIENT FIELD EXTRACTION CIRCUIT" (atty. docket no. NSC1-63900); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "NON-ARITHMETICAL CIRCULAR BUFFER CELL AVAILABILITY STATUS INDICATOR CIRCUIT" (atty. docket no. NSC1-64000); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "TAGGED PREFETCH AND INSTRUCTION DECODER FOR VARIABLE LENGTH INSTRUCTION SET AND METHOD OF OPERATION" (atty. docket no. NSC1-64100); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "PARTITIONED DECODER CIRCUIT FOR LOW POWER OPERATION" (atty. docket no. NSC1-64200); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "CIRCUIT FOR DESIGNATING INSTRUCTION POINTERS FOR USE BY A PROCESSOR DECODER" (atty. docket no. NSC1-64300); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "CIRCUIT FOR GENERATING A DEMAND-BASED GATED CLOCK" (atty. docket no. NSC1-64500); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "INCREMENTOR/DECREMENTOR" (atty. docket no. NSC1-64700); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "A PIPELINED MICROPROCESSOR THAT PIPELINES MEMORY REQUESTS TO AN EXTERNAL MEMORY" (atty. docket no. NSC1-64800); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "CODE BREAKPOINT DECODER" (atty. docket no. NSC1-64900); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "TWO TIER PREFETCH BUFFER STRUCTURE AND METHOD WITH BYPASS" (atty. docket no. NSC1-65000); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "INSTRUCTION LIMIT CHECK FOR MICROPROCESSOR" (atty. docket no. NSC1-65100); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "A PIPELINED MICROPROCESSOR THAT MAKES MEMORY REQUESTS TO A CACHE MEMORY AND AN EXTERNAL MEMORY CONTROLLER DURING THE SAME CLOCK CYCLE" (atty. docket no. NSC1-65200); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "APPARATUS AND METHOD FOR EFFICIENT COMPUTATION OF A 486™ MICROPROCESSOR COMPATIBLE POP INSTRUCTION" (atty. docket no. NSC1-65700); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "APPARATUS AND METHOD FOR EFFICIENTLY DETERMINING ADDRESSES FOR MISALIGNED DATA STORED IN MEMORY" (atty. docket no. NSC1-65800); U.S. patent application

Serial No. 08/\_\_\_\_\_, entitled "METHOD OF IMPLEMENTING FAST 486™ MICROPROCESSOR COMPATIBLE STRING OPERATION" (atty. docket no. NSC1-65900); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "A PIPELINED MICROPROCESSOR THAT PREVENTS THE CACHE FROM BEING READ WHEN THE CONTENTS OF THE CACHE ARE INVALID" (atty. docket no. NSC1-66000); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "DRAM CONTROLLER THAT REDUCES THE TIME REQUIRED TO PROCESS MEMORY REQUESTS" (atty. docket no. NSC1-66300); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "INTEGRATED PRIMARY BUS AND SECONDARY BUS CONTROLLER WITH REDUCED PIN COUNT" (atty. docket no. NSC1-66400); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "SUPPLY AND INTERFACE CONFIGURABLE INPUT/OUTPUT BUFFER" (atty. docket no. NSC1-66500); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "CLOCK GENERATION CIRCUIT FOR A DISPLAY CONTROLLER HAVING A FINE TUNEABLE FRAME RATE" (atty. docket no. NSC1-66600); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "CONFIGURABLE POWER MANAGEMENT SCHEME" (atty. docket no. NSC1-66700); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "BIDIRECTIONAL PARALLEL SIGNAL INTERFACE" (atty. docket no. NSC1-67000); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "LIQUID CRYSTAL DISPLAY (LCD) PROTECTION CIRCUIT" (atty. docket no. NSC1-67100); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "IN-CIRCUIT EMULATOR STATUS INDICATOR CIRCUIT" (atty. docket no. NSC1-67400); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "DISPLAY CONTROLLER CAPABLE OF ACCESSING GRAPHICS DATA FROM A SHARED SYSTEM MEMORY" (atty. docket no. NSC1-67500); U.S. patent application Serial No. 08/\_\_\_\_\_, entitled "INTEGRATED CIRCUIT WITH TEST SIGNAL BUSES AND TEST CONTROL CIRCUITS" (atty. docket no. NSC1-67600); U.S. patent application Serial no. 08/\_\_\_\_\_, entitled "DECODE BLOCK TEST METHOD AND APPARATUS" (atty. docket no. NSC1-68000).

It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is intended that the following claims define the scope of the invention and that structures and methods within the scope of these claims and their equivalents be covered thereby.

CLAIMS

What is claimed is:

1. An oscillator interface for use in a power management system, comprising:
  - an interface circuit for interfacing with an external oscillator used as a source of oscillations;
  - a clock stabilization filter for masking out spurious crystal frequencies in the oscillations during start-up of the power management system following an enabling of a feedback loop, the clock stabilization filter having circuitry which provides that the oscillations will start with a rising transition after filtering;
  - a bypassing circuit for enabling the clock stabilization filter when the external oscillator is a crystal oscillator and for bypassing the clock stabilization filter when the external oscillator is a can oscillator; and
  - a masking circuit which masks the oscillations from the rest of the power management system, the masking circuit having circuitry which disables the clock masking after a falling edge of the oscillations and starts back up with a rising transition of the oscillations.
2. A power recycle circuit for use in a power management system, comprising:
  - an input for receiving a clock signal;
  - a detection circuit for sensing a minimum disable pulse when a clock signal is received and when a clock signal is not received;
  - a power recycle circuit for generating a power recycle signal in response to the minimum disable pulse; and
  - a state machine for holding the power recycle signal for at least two clock cycles.
3. A pad clock and self test circuit for use in a power management system, comprising:
  - an input for receiving an oscillator clock; and
  - a clock generation circuit for generating at a clock output a first pad clock having a frequency approximately equal to one-half a frequency of the oscillator clock, a second pad clock having a frequency that is forced equal to a programmable fraction of the frequency of the oscillator clock, and a low signal, the clock generation circuit having a first operating mode in which the second pad clock is generated and a second mode in which internal signals of the power management system can be observed and the clock output is forced to a known level.
4. A clock enable circuit for use in a power management system, comprising:
  - a clock branch generator for generating a first clock signal to drive a sequential device which is internal to the power management system; and
  - clock enabling/disabling circuitry which disables the first clock after a falling edge on an internal source clock, holds the first clock low during disabling, re-enables the first clock after a falling edge of the internal source clock, and subsequently begins a first rise of the first clock with a next rising transition of the internal source clock, the clock enabling/disabling circuitry not stopping an external CPU core clock when the external CPU is actively performing a bus cycle.

5. A power level detect circuit for use in a power management system, comprising:
  - an analog voltage-level detector interface having a programmable override function for providing a digitally encoded voltage level as an output which is used for global configuration;
  - an input for receiving an analog enable signal to turn on a DC-current source of an external voltage-level detector and a read strobe; and
  - a voltage-level detector input which can be sampled.
6. An internal source clock generation circuit for use in a power management system, comprising:
  - a synchronous counter with a synchronous load to a count of one and an asynchronous clear, the synchronous counter having a plurality of count output signals;
  - a first multiplexer coupled to the synchronous counter for receiving the plurality of count output signals, the first multiplexer having two outputs;
  - a second multiplexer coupled to the first multiplexer, the second multiplexer having one output;
  - a flip-flop coupled to the output of the second multiplexer; and
  - a clock referenced to an external oscillator clock for sampling an output of the flip-flop.
7. A power-save mode change detection circuit for use in a power management system, comprising:
  - an internal source clock;
  - a first bank of flip-flops coupled to the internal source clock;
  - a second bank of flip-flops coupled to the internal source clock;
  - a comparator for comparing the first and second banks of flip-flops, the comparator generating an equality signal when there is a difference between storage values of the first and second banks of flip-flops;
  - means for asserting a change indicator when a power-save mode is asserted in one of the first and second banks of flip-flops; and
  - means for sampling the change indicator with a clock which is referenced to a falling edge of a system clock and for generating a synchronous load 1 pulse until a next rising edge of an internally qualified reference or an external oscillator clock.

## POWER MANAGEMENT BLOCK

30

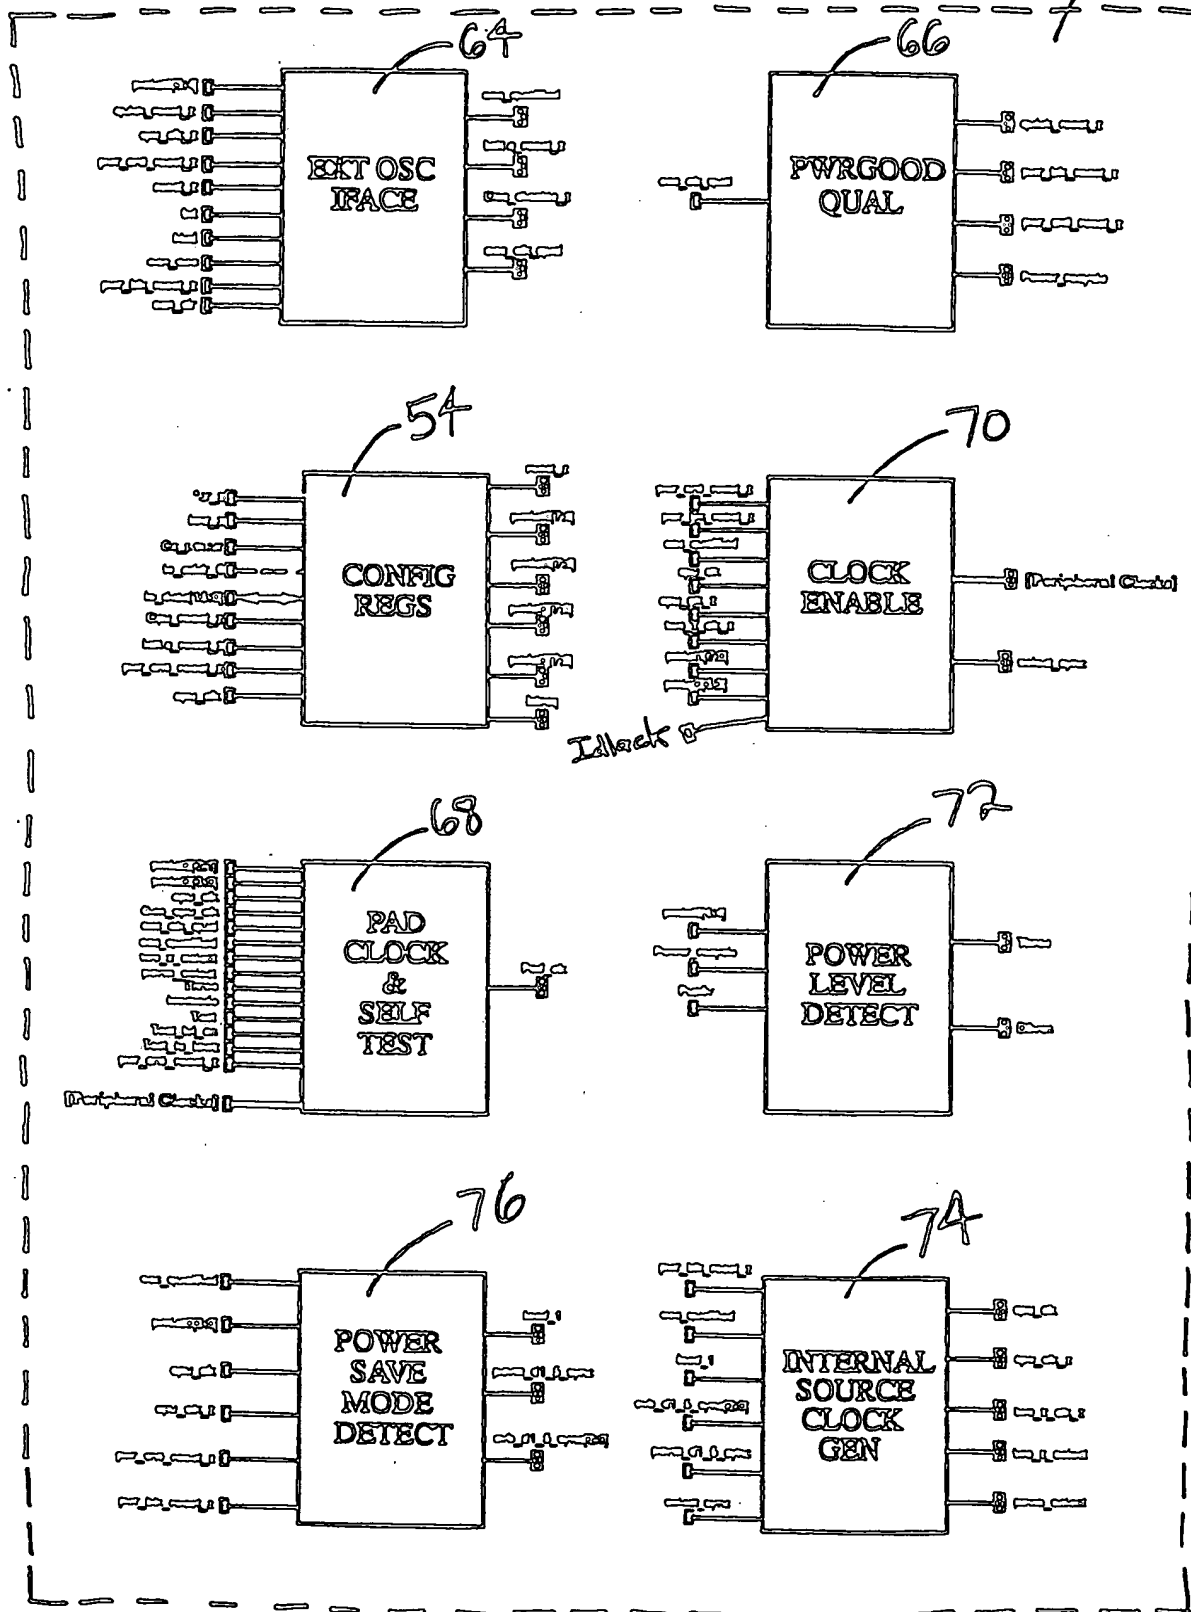


Fig. 1 1/12



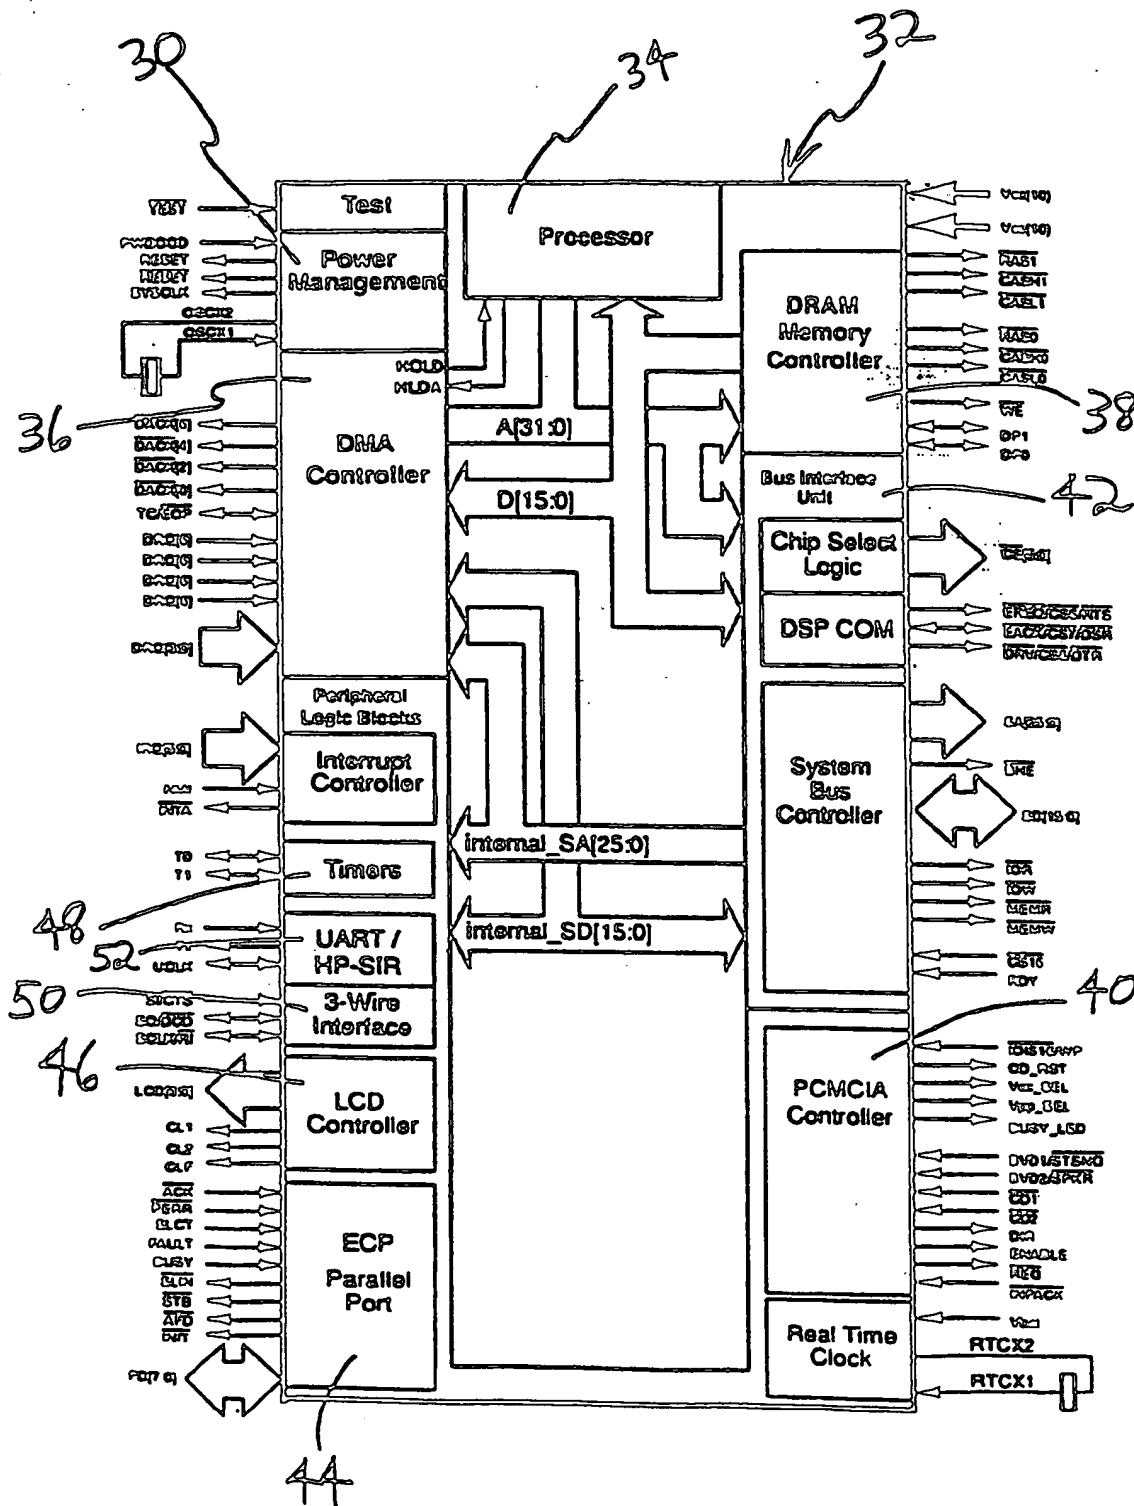


Fig. 2





## PWRGOOD QUALIFICATION

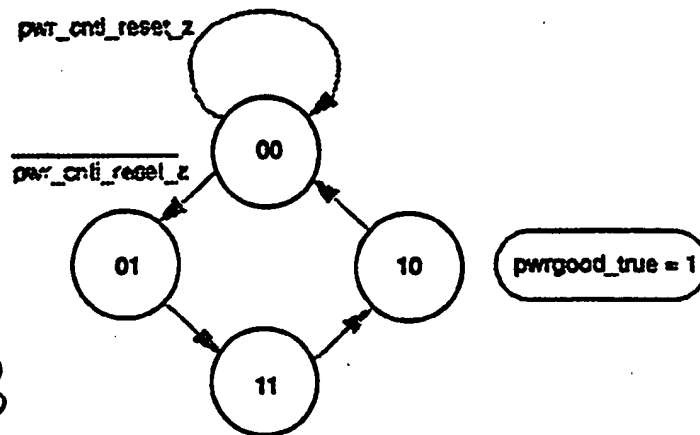


Fig. 5B


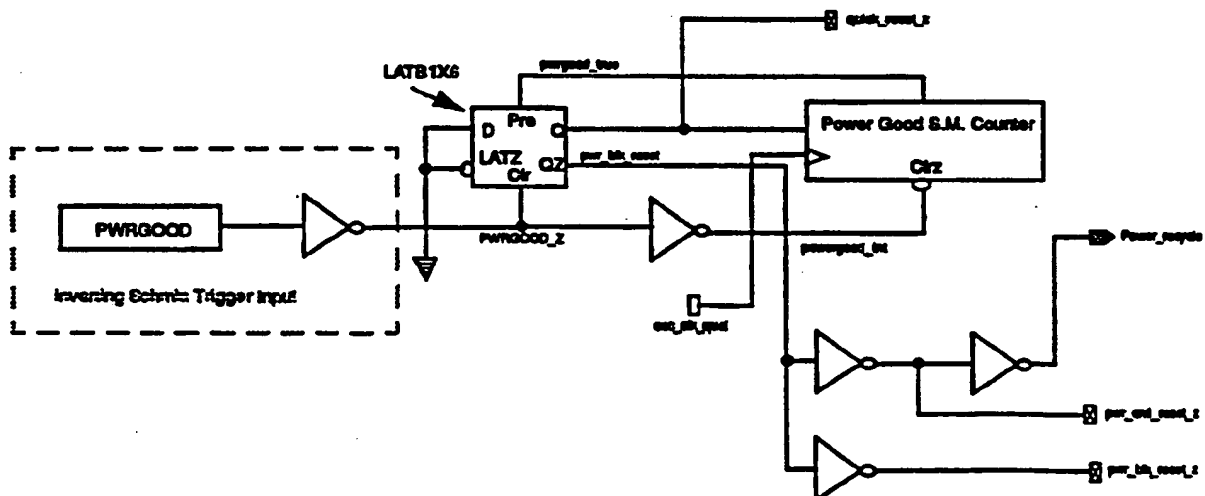


Fig. 5A

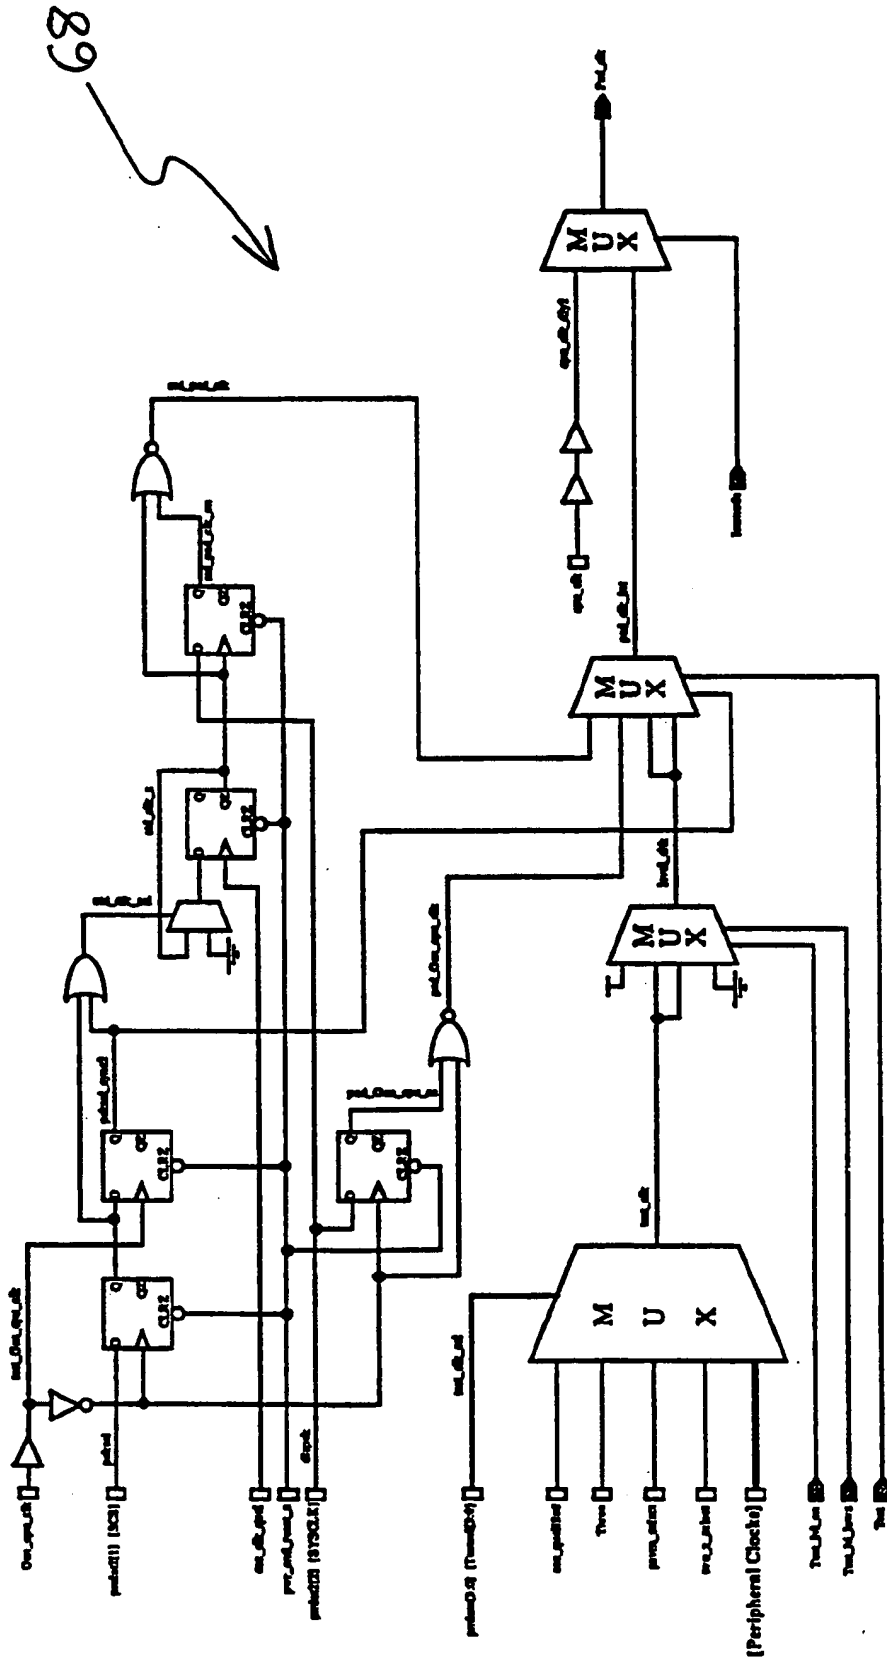

PAD CLOCK & SELF TEST

Fig. 6

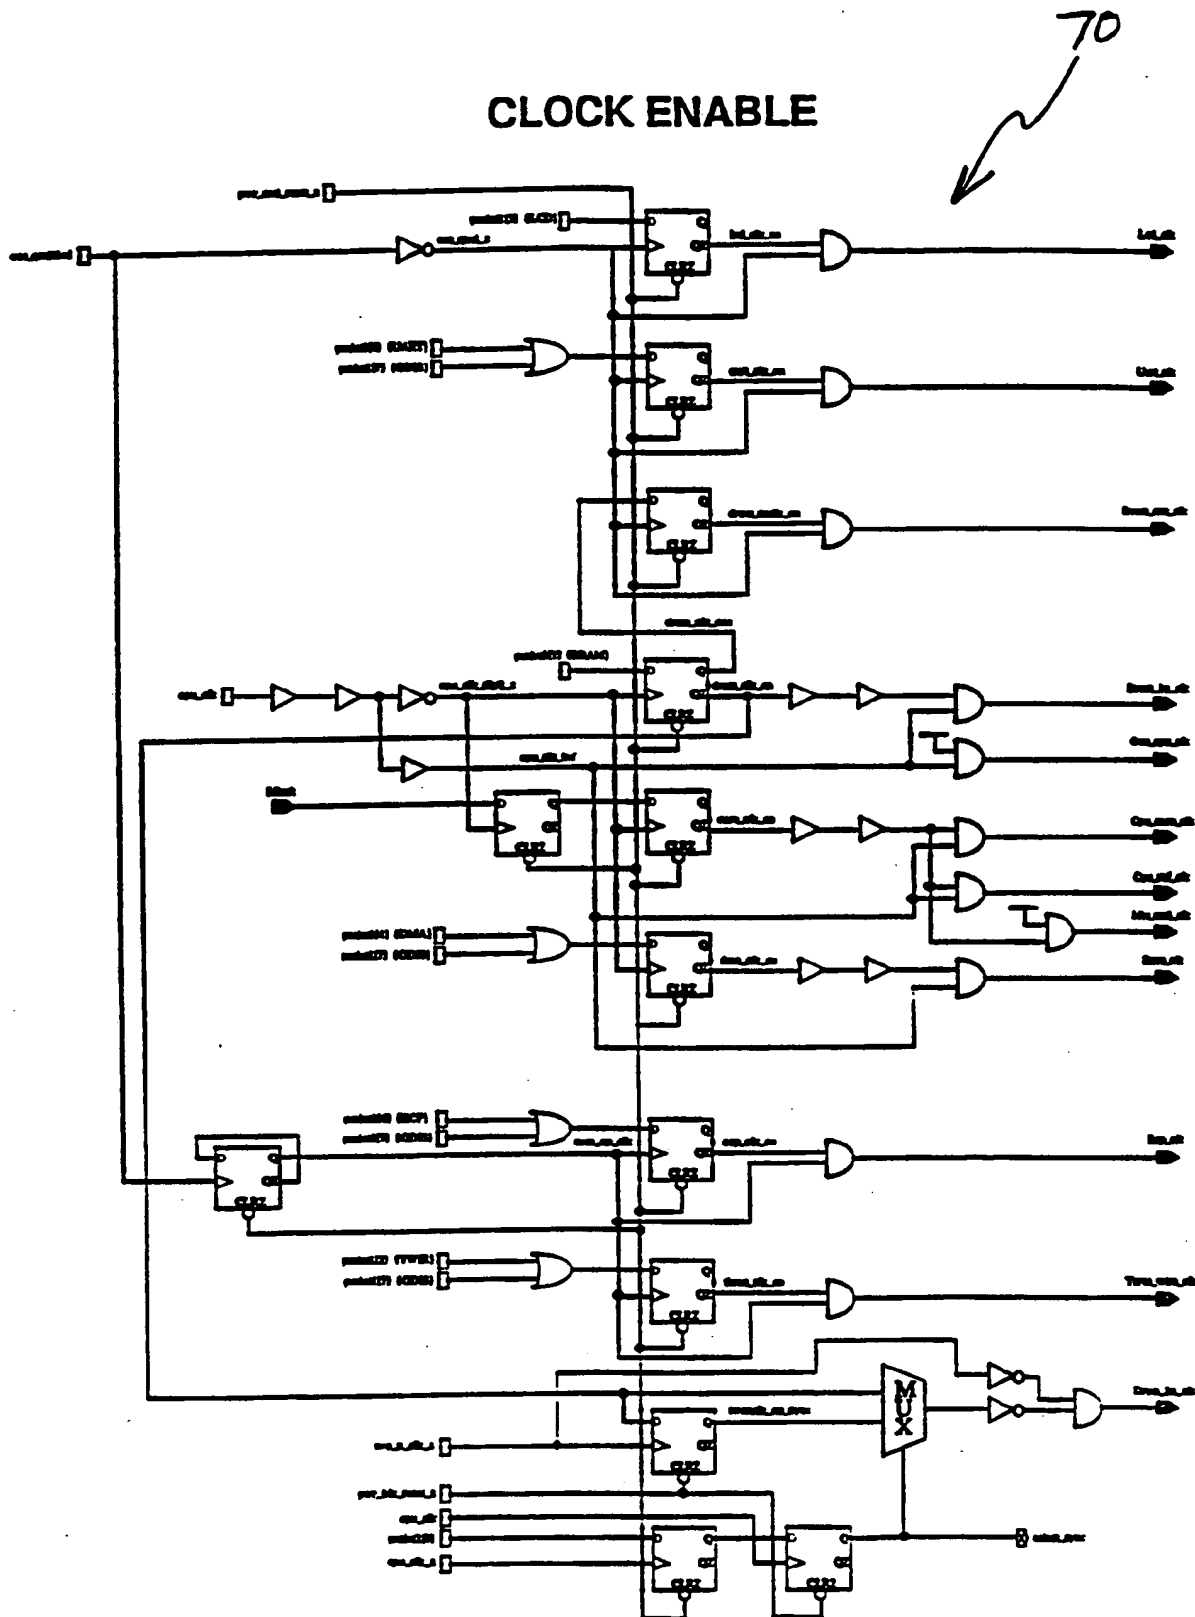


Fig. 7A

## CLOCK ENABLE cont'd

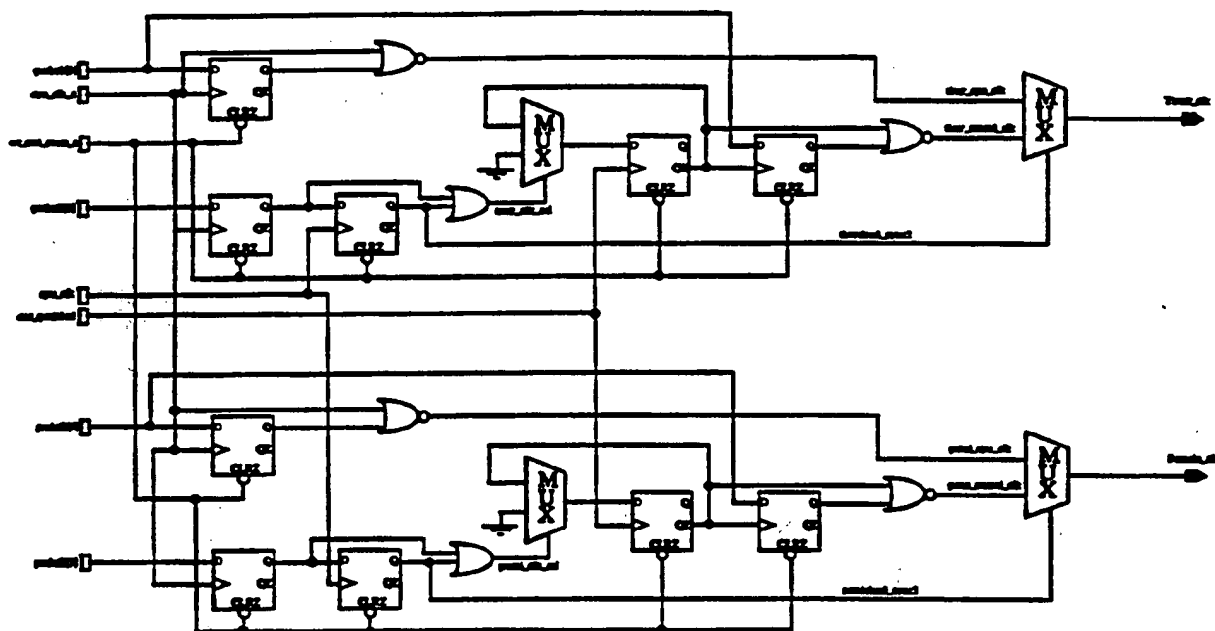


Fig. 7B

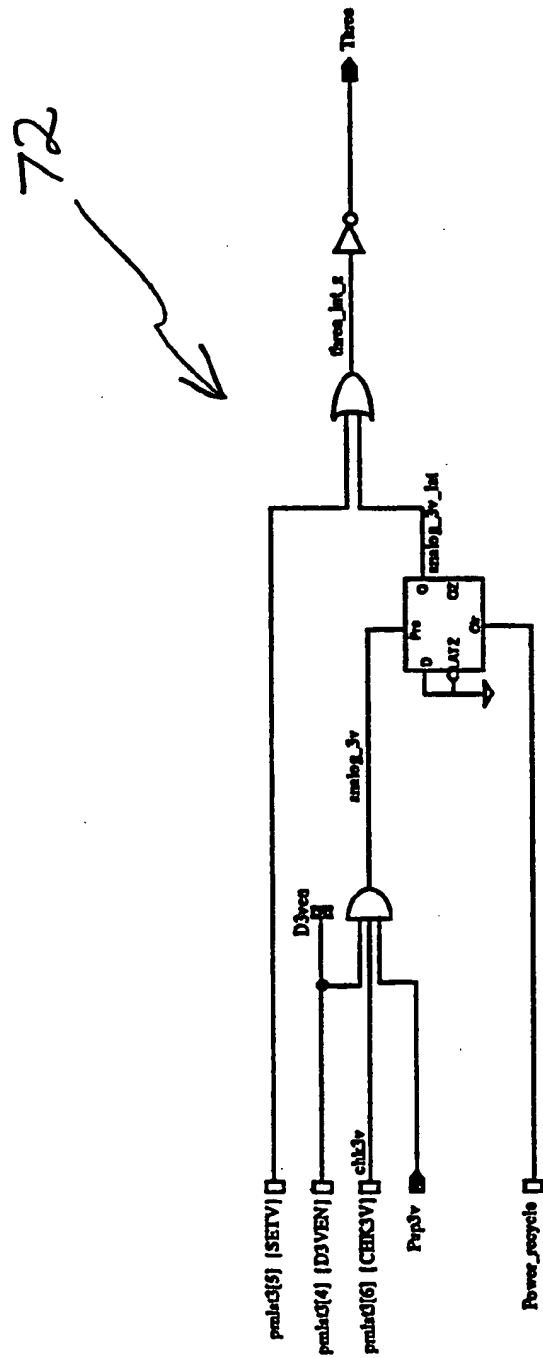


Fig. 8

# POWER LEVEL DETECT




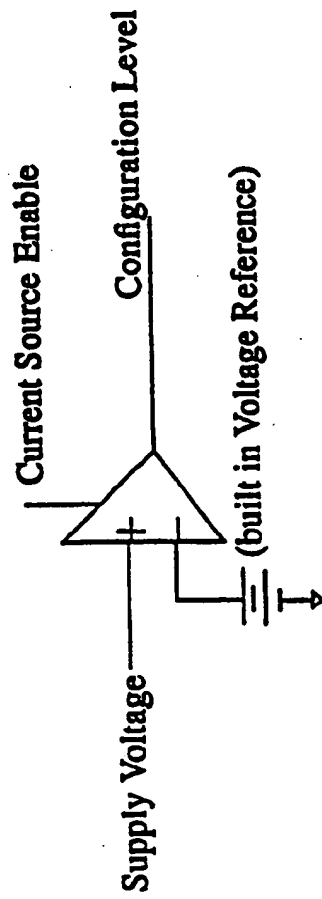


Fig. 9

## INTERNAL SOURCE CLOCK GENERATION

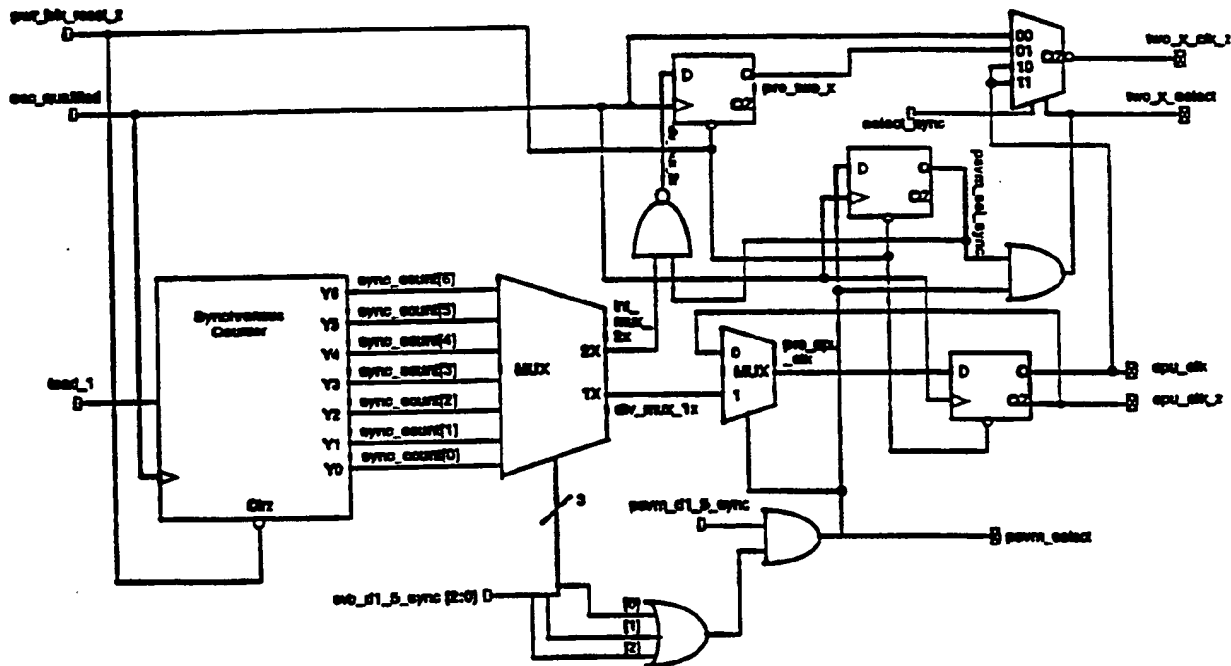

74 ↗




Fig. 10

# POWER-SAVE MODE CHANGE DETECTION

76

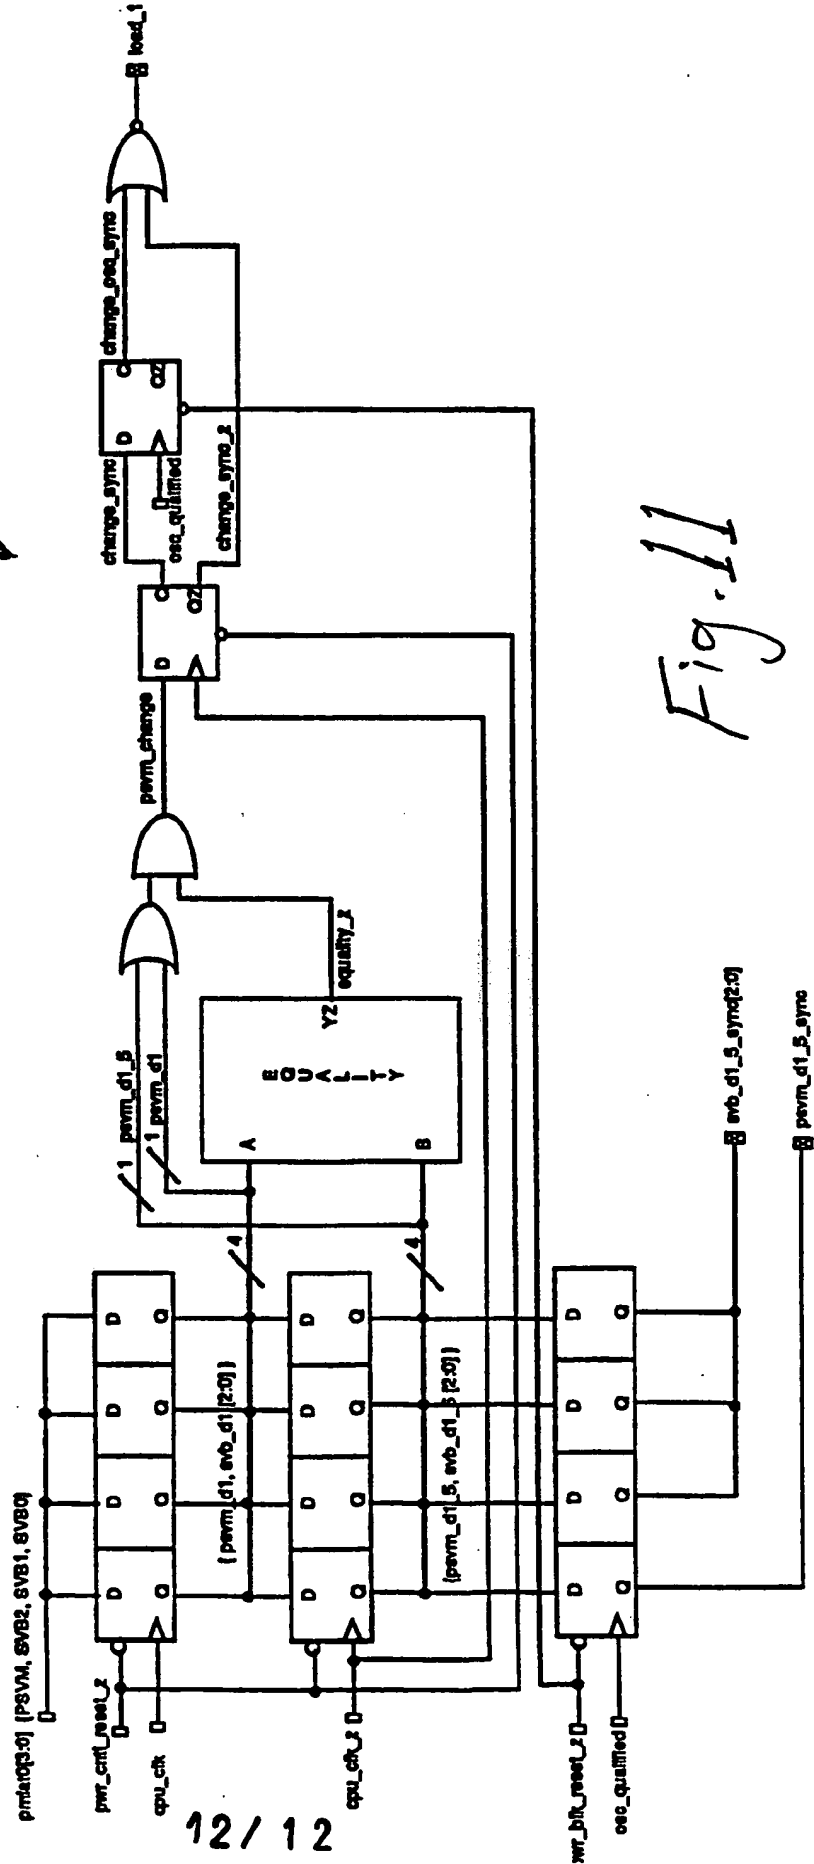


Fig. 11



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification<sup>6</sup>:

H03L 3/00, G06F 1/04, 1/32

A3

(11) International Publication Number:

WO 96/37960

(43) International Publication Date:

28 November 1996 (28.11.96)

(21) International Application Number: PCT/US96/07571

(22) International Filing Date: 23 May 1996 (23.05.96)

(30) Priority Data:

08/451,206

26 May 1995 (26.05.95)

US

(71) Applicant: NATIONAL SEMICONDUCTOR CORPORATION [US/US]; 2900 Semiconductor Drive, M/S D3-579, Santa Clara, CA 95051 (US).

(72) Inventor: SHAY, Michael, J.; 2021 Thames Drive, Arlington, TX 76017 (US).

(74) Agent: CONSER, Eugene; National Semiconductor Corporation, 2900 Semiconductor Drive, M/S D3-579, Santa Clara, CA 95051 (US).

(81) Designated States: DE, KR, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

*With international search report.**Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.*


(86) Date of publication of the international search report:

6 February 1997 (06.02.97)

(54) Title: CONFIGURABLE POWER MANAGEMENT SCHEME

## (57) Abstract

A power management system is disclosed. The system includes an oscillator interface for use in a power management system, a power recycle circuit for use in a power management system, a pad clock and self test for use in a power management system, a clock enable circuit for use in a power management system, a power level detect circuit for use in a power management system, an internal source clock generation circuit for use in a power management system, and a power-save mode change detection circuit for use in a power management system. The oscillator interface includes an interface circuit for interfacing with an external oscillator used as a source of oscillations. A clock stabilization filter masks out spurious crystal frequencies in the oscillations during start-up of the power management system following an enabling of a feedback loop. The clock stabilization filter has circuitry which provides that the oscillations will start with a rising transition after filtering. A bypassing circuit enables the clock stabilization filter when the external oscillator is a crystal oscillator and for bypassing the clock stabilization filter when the external oscillator is a can oscillator. A masking circuit masks the oscillations from the rest of the power management system. The masking circuit has circuitry which disables the clock masking after a falling edge of the oscillations and starts back up with a rising transition of the oscillations.

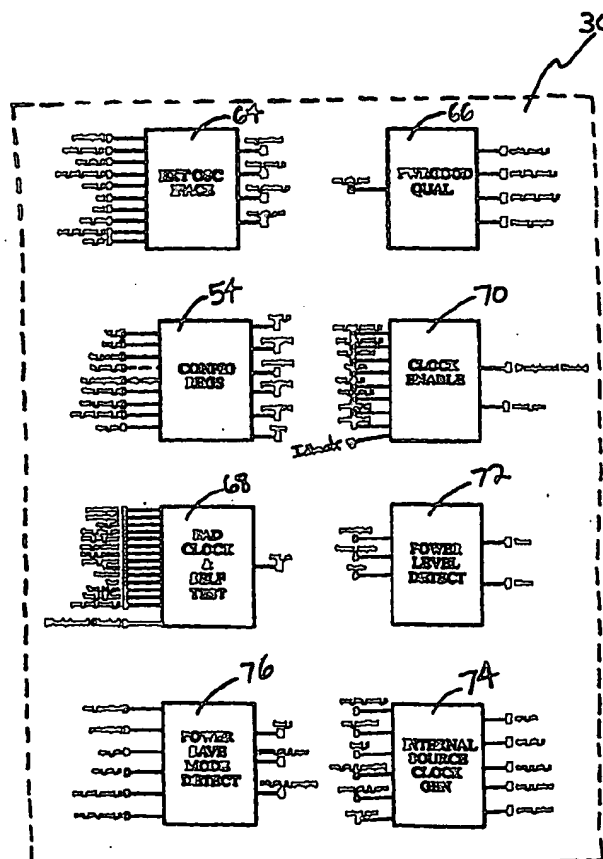

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H03L3/00 G06F1/04 G06F1/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H03L G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93 10493 A (MICROCHIP TECHNOLOGY INC) 27 May 1993 see page 7, line 23 - page 8, line 35 see page 25, line 25 - line 21 see page 27, line 17 - page 28, line 7 see page 29, line 6 - line 19 see figure 3 ---	1
X	US 5 388 265 A (VOLK ANDREW M) 7 February 1995 see abstract see column 18, line 40 - line 68 ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 011, no. 387 (E-566), 17 December 1987 & JP 62 151024 A (NEC CORP), 6 July 1987, see abstract --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 September 1996

Date of mailing of the international search report

20.12.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

CIARELLI, N

## INTERNATIONAL SEARCH REPORT

PCT/US 96/07571

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 152 (E-1057), 17 April 1991 & JP 03 026112 A (NEC CORP), 4 February 1991, see abstract ---	1
A	EP 0 633 518 A (PICOPOWER TECH INC) 11 January 1995 see column 3, line 1 - line 28; figures 1,2 -----	1

**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

see annexed sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.



# INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 96/07571

FURTHER INFORMATION CONTINUED FROM PCT/ISA/210

1. Claim 1: A specific masking circuit masking the oscillation from the rest of the system.
2. Claim 2: A power recycle circuit.
3. Claim 3: A pad clock and self test circuit.
4. Claim 4: A clock enable circuit.
5. Claim 5: A power level detector circuit.
6. Claim 6: An internal source clock generation circuit.
7. Claim 7: A power-save mode change detection circuit.

## INTERNATIONAL SEARCH REPORT

PCT/US 96/07571

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9310493	27-05-93	EP-A- 0746817 JP-T- 7504282 US-A- 5454114	11-12-96 11-05-95 26-09-95
US-A-5388265	07-02-95	DE-A- 4307226 FR-A- 2689656 GB-A,B 2264794 JP-A- 7168654	09-09-93 08-10-93 08-09-93 04-07-95
EP-A-0633518	11-01-95	JP-A- 6350415	22-12-94